

5. make wiring connection and go through isolation treatment. (Figure 3-5)




Figure 3-5

6. Push the wires into junction box; after installation, tighten the screws. (Figure 3-6)




Figure 3-6

Standard wire:

L/live wire:Black\Brown; N/null wire:White\Blue;
Ground wire:Green\Yellow-green.

Warning/Avertissement :

MIN 75 °C SUPPLY CONDUCTOR

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

LES FILS D'ALIMENTATION 75 °C MIN
CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS.

LED Wall Pack Light Instruction

Warning :

1. Can not use the electric generator to test the LED lamp.
2. This luminaire must be installed in accordance with your local electrical codes and requirements;
3. Do not install the luminaire in the rain, to avoid lightning stroke and damage to luminaire.

Installation notice :

1. This luminaire must be installed by qualified electrician to avoid electric shock and fire accident;
2. Wear gloves before installation in order to avoid injury;
3. Turn off the power immediately when there is smoke and fire during installation; inform professionals to overhaul;
4. This luminaire is suited for outdoor use.

The installation of the product can be used when it is marked with "✓".

Installation I :

Wiring from the bottom of luminaire

1. Cut holes on the wall according to locating plate. (Figure 1-1)




Figure 1-1

2. Fix rubber plugs into holes. (Figure 1-2)




Figure 1-2

3. Align mounting bracket with hole; tighten screws (Figure 1-3)




Figure 1-3

4. Make wiring connection and go through isolation treatment. (Figure 1-4)




Figure 1-4

5. Fix the luminaire on the bracket and tighten screws on the bottom. (Figure 1-5)




Figure 1-5

6. After installation, tighten the screws. (Figure 1-6)




Figure 1-6

5. Tighten the pipe on the luminaire; after installation, tighten the screws. (Figure 2-5)

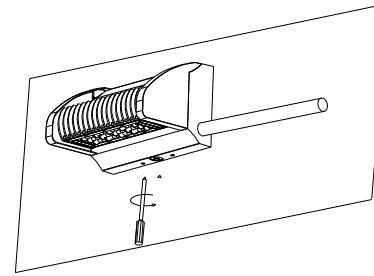


Figure 2-5

**Installation II:
Wiring from the side of luminaire**

1. Cut holes on the wall according to locating plate. (Figure 2-1)




Figure 2-1

2. Fix rubber plugs into holes. (Figure 2-2)




Figure 2-2

3. Align mounting bracket with hole; tighten screws. (Figure 2-3)




Figure 2-3

4. Fix the luminaire on the bracket; make wiring connection from side and go through isolation treatment. (Figure 2-4)

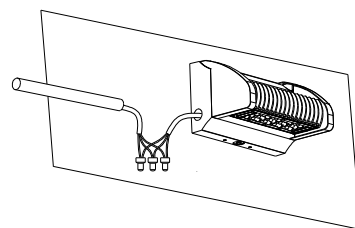


Figure 2-4

**Installation III:
Bracket installation**

1. Cut holes on the wall according to locating plate. (Figure 3-1)




Figure 3-1

2. Fix rubber plugs into holes. (Figure 3-2)

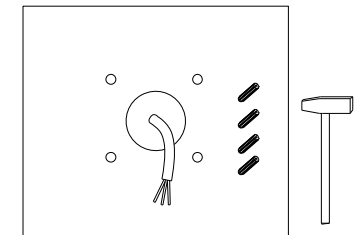


Figure 3-2

3. Align mounting bracket with hole; tighten screws. (Figure 3-3)




Figure 3-3

4. Pass wires through rubber ring and junction box, align with holes and lock junction box. (Figure 15)




Figure 3-4